



SureCall FORCE8™ Industrial



Large & Enterprise
Building Coverage



All US Carriers
Voice, Text, & 4G LTE



5G Booster for
AT&T & T-Mobile



Remote
Monitoring

Sentry™ Equipped 3G, 4G LTE and 5G Signal Amplifier for Large Buildings

Overview

SureCall's Force8 is the first bi-directional cell signal amplifier for the 5G network. With the approval of all boosted carriers, Force8 improves 5G cell service for the T-Mobile (600 MHz band) and AT&T (2.3 GHz band). Additionally, Force8 is a HetNet and HetGen solution that improves cell service for every US cellular network and all cellular generations including 3G and 4G LTE voice, text, and data signals.

The Force8 industrial grade cell phone signal booster is equipped with Sentry to allow remote access to make adjustments to the system anytime and anywhere via desktop or mobile application (iPhone | Android).

Features

- First 5G signal booster that improves 5G service inside buildings for the T-Mobile (600 MHz) and AT&T (2.3 GHz) bands
- Improves 3G and 4G LTE voice, text, and data signals for every US cell carrier, including the Sprint (800 MHz) and AWS-3 bands
- Eliminates dropped and missed calls in buildings up to 80,000-square-feet*
- Built-in Sentry remote monitoring system allows cloud controlled adjustments to the booster anytime and anywhere via desktop or mobile app (iPhone | Android)
- Each band is independently configurable to function in the most challenging environments
- Customizable kitting and multi-amplifier scalability provide the flexibility to accommodate any floor plan
- Best-in-Industry three-year warranty

Booster Kit Includes

Force8 Industrial booster with built-in Sentry monitoring system, power supply, USB cable to set up Sentry software

Additional Required Components

- An outside antenna (such as SC-230W Yagi or SC-288W omni-directional antenna)
- Multiple indoor antennas (such as, SC-222W omni-directional dome or SC-248W directional panel antennas)
- Cable splitter for multiple indoor antennas
- Sufficient low loss 50 ohm cable for interior/exterior antenna connection
- Lightning protector & grounded surge suppressor
- Ethernet cable to connect the booster to your router (for Sentry monitoring)

* Performance and coverage area are dependent upon the strength of cell signal outside of the building and density of structure and materials inside of the building.



The SureCall Force8 Industrial Amplifier

Key Product Specifications

Supported Standards:	LTE-A, LTE-V, PCS, AWS & AWS-3, T-Mobile 600 MHz, Sprint 800 MHz, AT&T WCS
Max Gain:	80 dB
Gain Adjustment Range:	50 dB
Noise Figure:	7 dB
VSWR:	≤ 2.0
Max Output Power:	3 Watt EIRP
RF Connectors:	N Female (both ends)
Power Consumption:	<65W



48346 Millmont Dr.
Fremont, CA 94538
888-365-6283

www.surecall.com
info@surecall.com



FORCE8™ Industrial


3G, 4G LTE and 5G Signal Amplifier for Large Buildings

Force8 Industrial Specifications

Uplink Frequency Range (MHz):	663–716 / 776–787 / 819–849 / 1850–1915 / 1710–1780 / 2305–2315
Downlink Frequency Range (MHz):	617–652 / 728–746 / 746–757 / 864–894 / 1930–1995 / 2110–2180 / 2350–2360
Supported Standards:	LTE-A, LTE-V, PCS, AWS & AWS-3, T-Mobile 600 MHz, Sprint 800 MHz, AT&T WCS
Input / Output Impedance:	50 Ω
Maximum Gain:	80 dB
Gain Adjustment Range:	50 dB
Noise Figure:	7 dB
VWSR:	≤2.0
Maximum Output Power:	3 Watt EIRP
RF Connectors:	N Female, both ends
Cable:	SC-400 (not provided)
AC Power Adapter:	Input AC 110-240 V, 60 Hz / Output DC 19 V
Power Consumption:	<65W
Dimensions:	14.5 x 11.0 x 3.5 inches
Weight:	20 lbs

Specifications are subject to change.

Installation Example

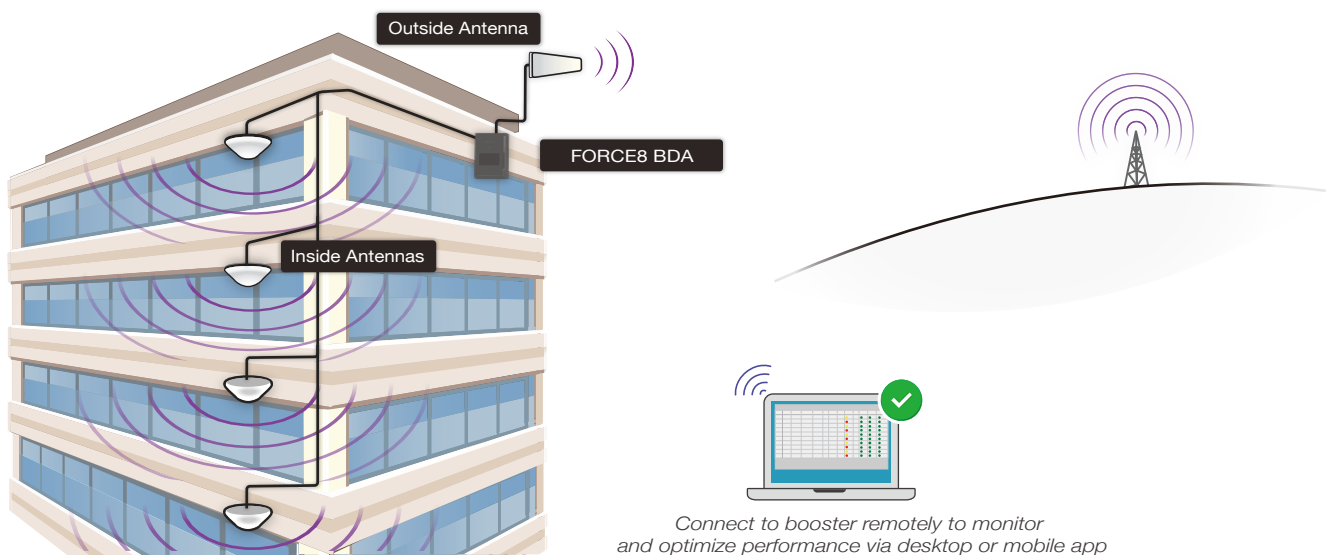

*** WARNING:**

This is NOT a CONSUMER device. It is designated for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each violation.

* Cancer and Reproductive Harm – www.P65Warnings.ca.gov